
THE ULTIMATE POWER SOURCE









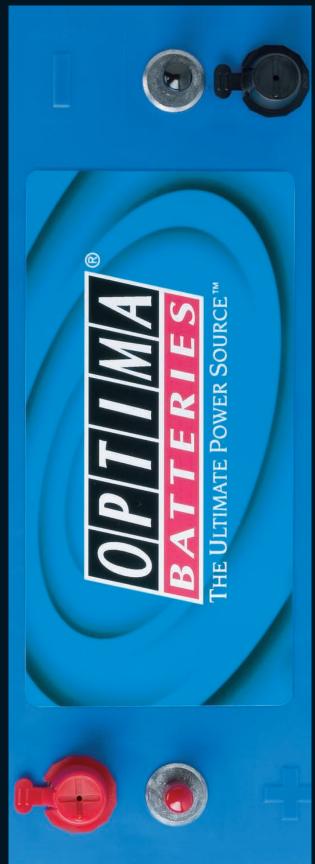




STARTING AND DEEP CYCLE BATTERIES FOR MARINE AND RV APPLICATIONS

The OPTIMA® BlueTop® comes in two varieties, which makes it ideal for use in all marine applications. One version is a powerful starter battery that, even when operating in the wettest conditions, or in situations where the battery has not been in use for long periods, delivers maximum power. The other version is a starter/ deep cycle battery that also provides power to all your onboard equipment and accessories.

This makes OPTIMA® BlueTop® the natural choice for any boat that needs to combine different battery requirements depending on the usage, environment and power needs.



Absorbent glass mat separator holds electrolyte like a sponge to eliminate acid spilling

OPTIMA® BLUETOP®	The property of the second	E amount		
	BT DC 5,5 (BCI D31M)	BT DC 5,0 (BCI D27M)	BT DC 4,2 (BCI D34M)	BT SLI 4,2 (BCI 34M)
Part Number	852 188 000 888 2	827 227 000 888 2	816 253 000 888 2	806 252 000 888 2
Length base: mm	317	300	245	245
Length top cover: mm	325	309	254	254
Height not including terminals: mm	218	200	173	173
Height including terminals: mm	238	221	200	200

Part Number	852 188 000 888 2	827 227 000 888 2	816 253 000 888 2	806 252 000 888 2
Length base: mm	317	300	245	245
Length top cover: mm	325	309	254	254
Height not including terminals: mm	218	200	173	173
Height including terminals: mm	238	221	200	200
Width base: mm	158	169	172	172
Width top cover: mm	165	172	175	175
Nominal Voltage: V	12	12	12	12
Cold Cranking Amps: (EN) CCA	975	845	765	815
Capacity: (EN) Ah	75	66	55	50
Reserve Capacity: (BCI) min	155	140	120	100
Weight: kg	26,5	22,7	19,7	17,4

Your authorised dealer/distributor

www.optimabatteries.com

